Bonnet Névé

Kaleïdo

PRODUCT OVERVIEW

Epta

The versatile chiller that complements the outfit range

Bonnet Névé

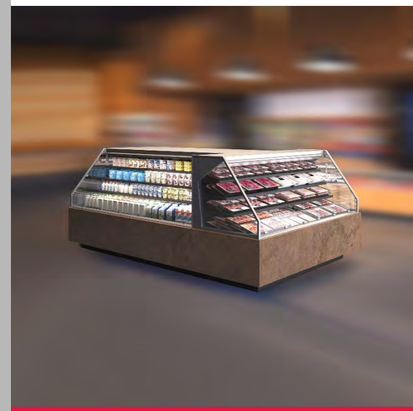

Kaleïdo

PRODUCT OVERVIEW

Epta

Overview | Product at a glance

An all-encompassing solution

- Three heights
- Three depths

- Design
- Design evolution
- Studio
- Style aesthetics

Suitable for any chilled product

Dedicated End of Island solution

Bonnet Névé

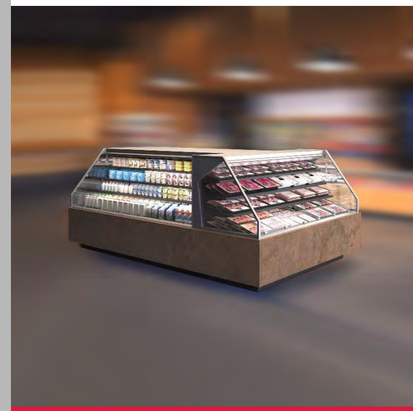

Kaleïdo

PRODUCT OVERVIEW

Epta

Overview | Highlights

The High Front Semivertical ideal for fresh food areas

An island with optimized sizes

A true member of the Outfit family

Performance and application improved

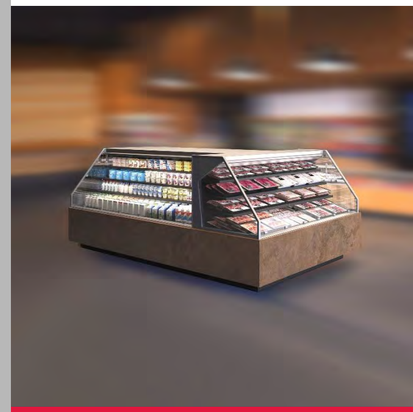

Kaleïdo

PRODUCT OVERVIEW

Overview | Product range

Batik cabinets are available in:

3 Heights
- H12
- H14
- H16

3 Widths
- Slim (S)
- Compact (C)
- Narrow (N)

4 Lenghts
- 125
- 188
- 250, 375 linears

EOL
- EOL (S)
- EOL (C)
- EOL (N)

3 Aesthetics
- Design
- Studio
- Style

Temperature class
- 3H
- 3M2
- 3M1

LED lighting
- Canopy
- Shelves
- Plinth

Fluids
- CO2
- R134A
- R404A
- R407A
- R407C
- R407F
- R410A
- R422D
- R448A
- R449
- Coolant

Controllers
- Carel
- Danfoss
- Dixell
- Eliwell
- Montolieu
- Wurm
- AF energy
- RDM
- Action Froid

Ticket holder position
- Shelves
- Front

Ticket holder type
- Universal rail
- Paper (25, 30, 40, 52mm)
- Electronic

Bonnet Névé

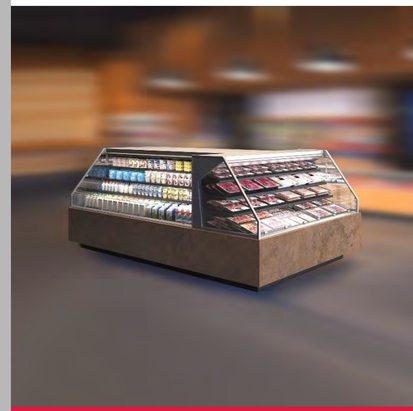

Kaleïdo

PRODUCT OVERVIEW

Epta

Overview | Availability

Availability H1200 Remote

First order loading
Week 31/2020

First delivery
Week 38/2020

Availability H1400 - 1600 Remote
H1200 Plug-In

First order loading
Week 42/2020

First delivery
Week 47/2020

Corners H14 and H16 available in W47, first delivery W02/21
In the meantime available as special product.

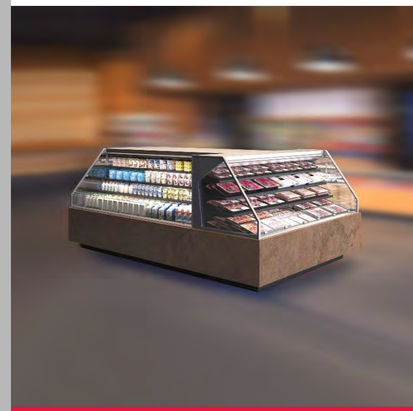

Kaleïdo

PRODUCT OVERVIEW

www.bonnetneve.com

Bonnet Névé

Epta

EUROVENT CERTIFIED PERFORMANCE
www.eurovent-certification.com

Epta S.p.A. participates in the ECC programme
for: Refrigerated display cabinets (RDC).
Check ongoing validity of certificate online:
www.eurovent-certification.com
or using www. certiflash.com

TÜV AUSTRIA CERTIFIED
TÜV AUSTRIA CERT GMBH

EN ISO 9001
20 100 52000877
EN ISO 14001
20 104 141373322
OHSAS 18001
20 116 141373323

CE