DUALIO CLOSED

Mozaïk / Serve-over counters

Serve-over

BEST ENERGY CLASS*



Product Categories

- Cheese
- Dairy products
- Delicatessen
- Meat
- Pre-packed fish
- Pre-packed fruit and vegetables
- Chicken

Technical Features

- High efficiency fans
- LED lighting
- Off-cycle defrost
- Remote condensing unit
- Ventilated

DUALIO CLOSED

Mozaïk / Serve-over counters

Serve-over

Certification and Patents



Eurovent

Product Range


DUALIO CLOSED (SLIDING & PUSH)											
Lenght-Lunghezza Longueur-Länge-Longitud mm		**1250**		**1875**		**2500**		**3750**		**EOL 1650**	**EOL 1900**
Width-Larghezza-Lergeur-Breite-Ancho mm		**E**	**M**	**E**	**M**	**E**	**M**	**E**	**M**	**E**	**M**
LL-235		•	•	•	•	•	•	•	•	•	•
MAX LL-365		•	•	•	•	•	•	•	•	•	•
Dispaly area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2	**STD LL235**	1.87	2.17	2.82	3.26	3.74	4.33	5.61	6.50	1.57	1.79
	MAX LL365	1.93	2,23	2.91	3.38	3.86	4.45	5.80	6.68	1.70	1.89
Net storage capacity Capacità netta Nutzinhalt volume utile Capacitad neta dm3	**STD LL235**	288	350	434	528	575	700	863	1050	181	2.74
	MAX LL365	393	475	592	716	786	950	1178	1425	234	325
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2		2.06	2.36	3.09	3.54	4.12	4.72	6.18	7.08	1.6	2.06
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de cheque joue Espesor lateral mm		50.00									

DUALIO CLOSED


Mozaïk / Serve-over counters

Serve-over


Cross Sections

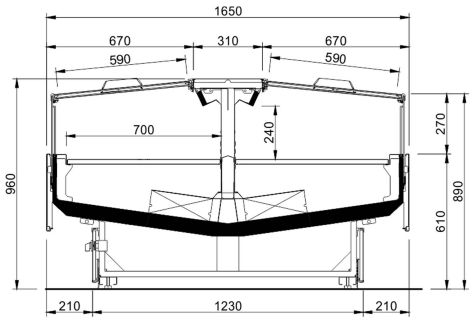


SILK C CLOSED - SLIDING

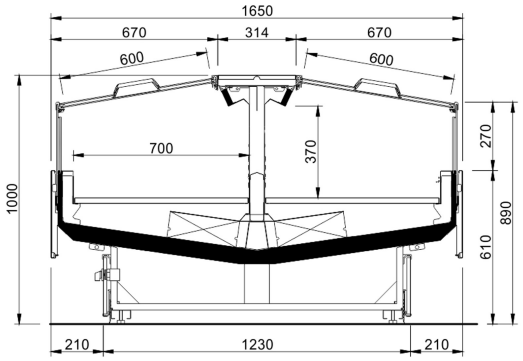


SILK C CLOSED MAX - SLIDING

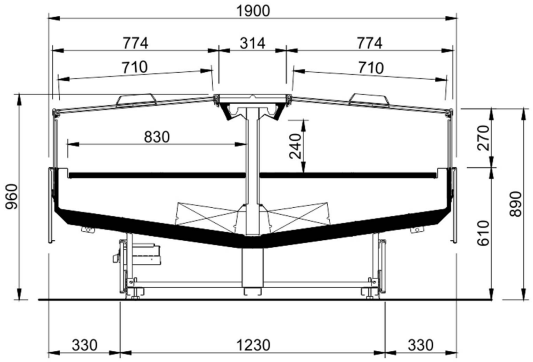


SILK N CLOSED - SLIDING

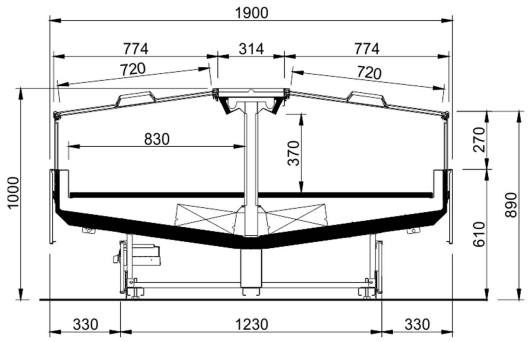

SILK N CLOSED MAX - SLIDING



SILK N CLOSED EOL - SLIDING




Silk C Closed EOL - SLIDING


DUALIO CLOSED

Mozaïk / Serve-over counters


Serve-over




SILK N CLOSED MAX EOL - SLIDING




SILC C CLOSED MAX EOL - SLIDING

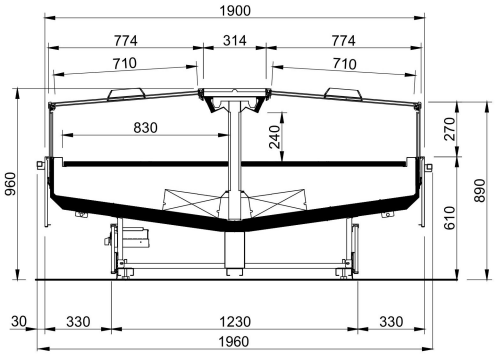


SILK N CLOSED WITH BUMPER RAIL - SLIDING

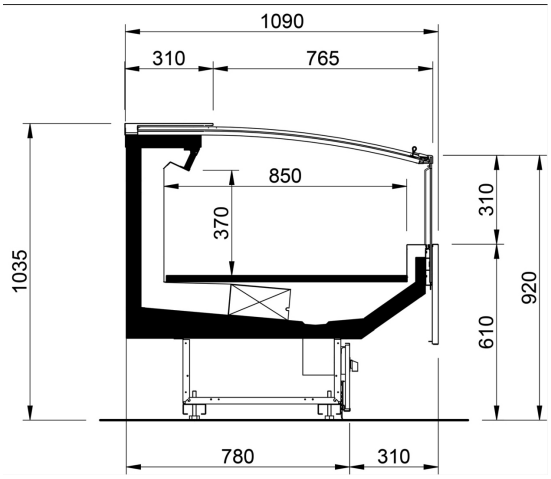

SILK N CLOSED MAX EOL - PUSH

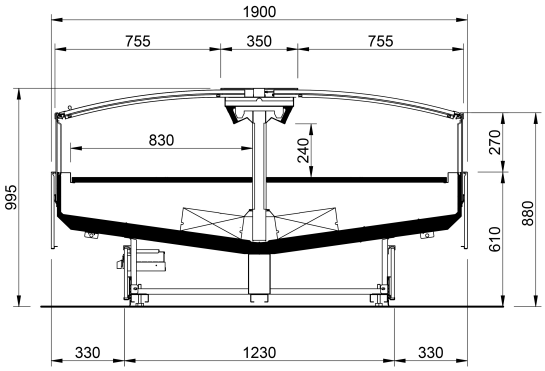

SILK N CLOSED - PUSH

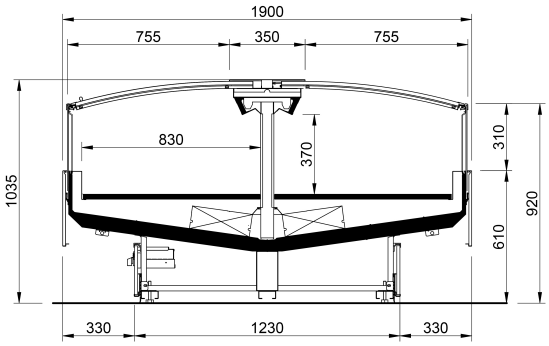


SILK N CLOSED MAXI - PUSH


DUALIO CLOSED

Mozaïk / Serve-over counters


Serve-over

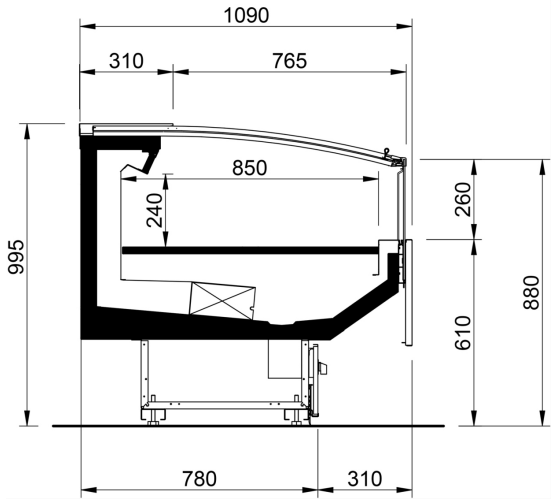


SILK N CLOSED EOL - PUSH

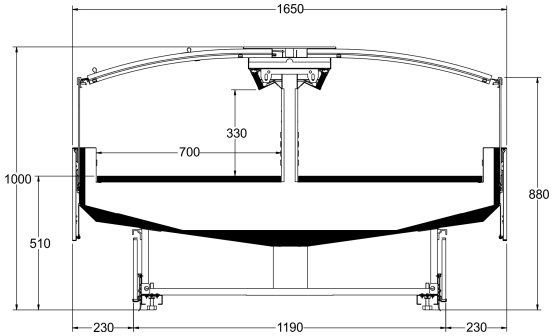


Sezione Silk C Closed - Push

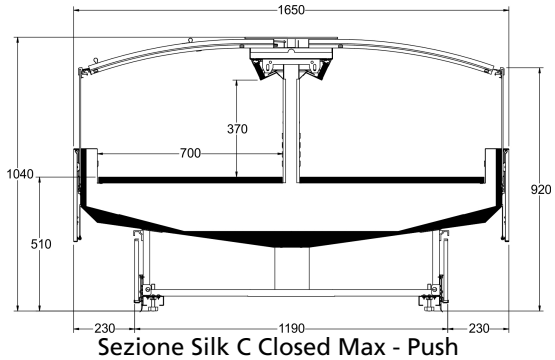

Sezione Silk C Closed Max - Push

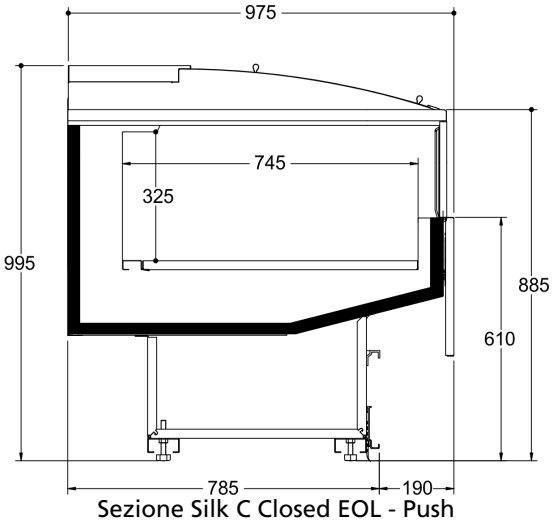

Sezione Silk C Closed EOL - Push

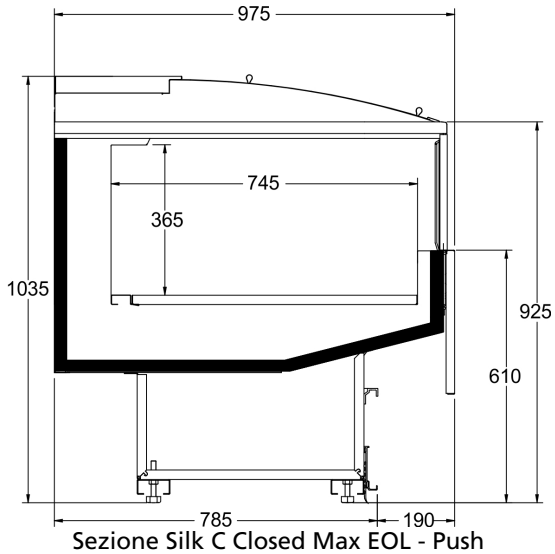

Sezione Silk C Closed Max EOL - Push

DUALIO CLOSED

Mozaïk / Serve-over counters

Serve-over

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.