





<b>Lenght-Lunghezza</b> Longueur-Länge-Longitud mm		<b>1250 - 2P</b>	<b>1875 - 3P</b>	<b>2500 - 4P</b>
<b>MULTIFRESH PLUS</b>	<b>EFFICIA</b>	▪	▪	▪
	<b>MODULAR</b>	▪	▪	▪
<b>Display area</b> Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2	<b>EFFICIA</b>	1,9	2,86	3,81
	<b>MODULAR</b>			
<b>Loading area</b> Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2	<b>EFFICIA</b>	0,96	1,44	1,86
	<b>MODULAR</b>	1,13	1,66	2,19
<b>Net storage capacity</b> Capacità netta Nutzinhalt volume utile Capacitat neta dm3	<b>EFFICIA</b>	674	1005	1345
	<b>MODULAR</b>	875	1320	1750
<b>End thickness</b> Spessore spalla Stärke der Seitenwand Épaisseur de cheque joue Espesor lateral mm	30			

## EFFICIA

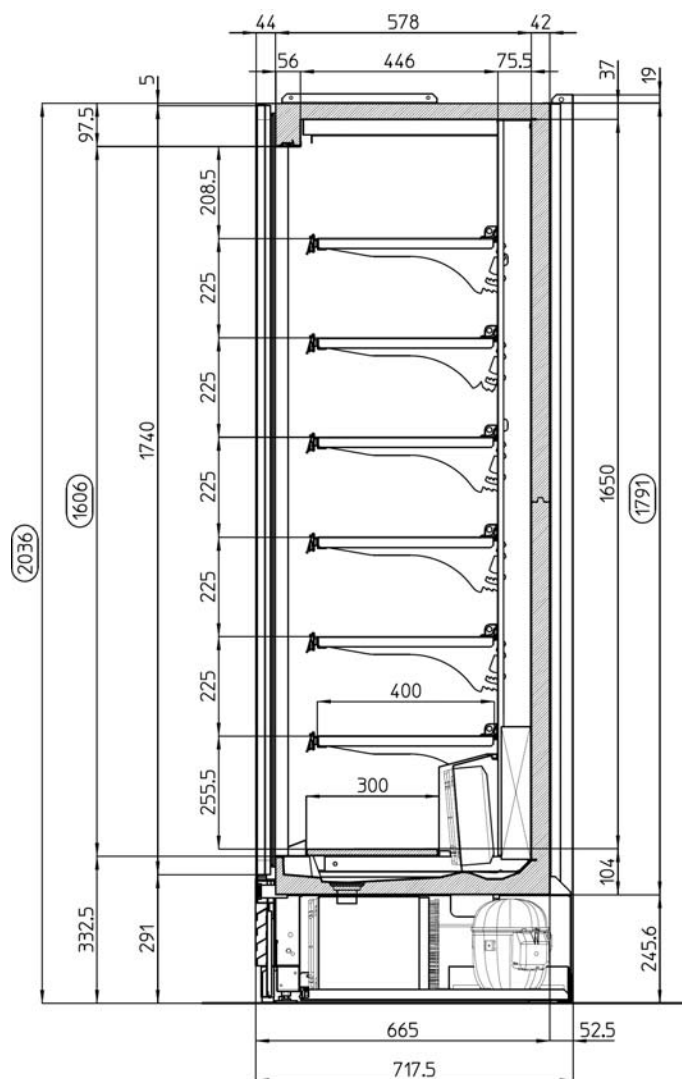

## NARROW

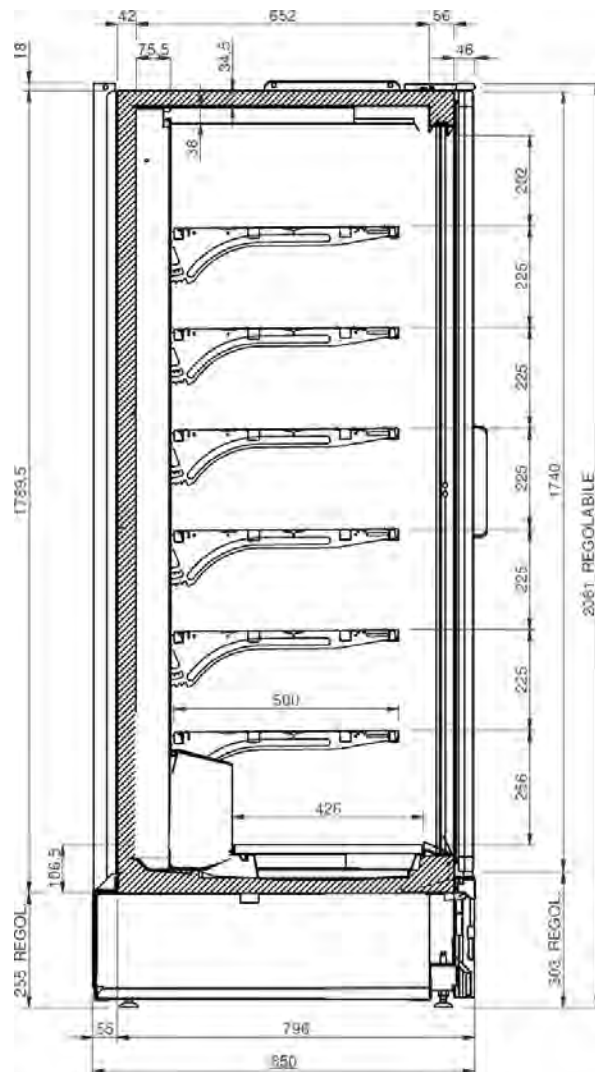

## Legend

 Meat	 Chicken	 Fish	 Pre-packed fish
 Delicatessen	 Cheese	 Dairy products	 Gastronomy
 Pastries	 Pre-packed fish	 Fruits and Vegetables	 Sandwiches
 Drinks	 Pizza	 Bread	 Frozen food and ice cream
 Off-cycle defrost	 Electric defrost	 Hot-gas defrosting system	 Manual defrost
 Ventilated	 Static	 Incorporated condensing unit	 Remote condensing unit
 Bagnomaria	 Ceramic glass	 Ice	 VSD Inverter technology
 LED lighting	 Zero C doors	 High efficiency fans	 R290 Propane refrigerant gas (R290)
 R-134a - 400V/3PH/50Hz	 R404A - 400V/3PH/50Hz	 R744 - 400V/PH/50Hz	 Semi-hermetic reciprocating compressor
 Hermetic scroll compressor	 Compressor hermetic reciprocating	 External installation	 Machinery room
 Soundproof housing	 On board condenser	 Remote condenser	 DUAL Medium & Low temperature